

GRADALL®

XE 4100

HYDRAULIC
EXCAVATOR



SPECIFICATIONS

Engine

- Volvo TAD583VE, Stage 5, 5.1L diesel with SCR, DPF + DOC and uncooled EGR

Gross Rating: 235 hp @ 2200 rpm (173kW), 700 lb-ft @ 1200-1400 rpm (949Nm)

- Four cycle, inline four cylinder, liquid cooled
- Turbo charge air after-cooled
- Off-road certified, electronically controlled, grid heater
- Vertical canister style lube and main filters attached to engine
- Volvo remote mount vertical style fuel/water separator with water in fuel indicator, alarm and manual feed pump
- Block heater

Air Filter

- Two-stage Donaldson PSD PowerCore with high efficiency pre-cleaner, vacuator valve and remote service indicator

Electrical System

- 24 volt, 110 amp alternator with integral voltage regulator, two SAE #C31-S 1000 CCA batteries

Fuel Tank Capacity: 100 gal (378 L)

Urea Tank Capacity: 11.9 gal (45 L)

Chassis Cooling Package

- Three aluminum bar-plate type coolers stacked vertically
- Air to air intake charge air cooler, radiator and transmission cooler
- All coolers backed by a molded fan shroud, engine mounted fan ring and 26.8" 9-blade fan driven by a Volvo electronically controlled variable speed fan drive

Gear Speeds

Gear	1	2	3	4	5	6	REV
MPH	6.3	16.2	24.1	37.4	50.6	59.9	6.6
Km/hr	(10.1)	(26.1)	(38.8)	(60.2)	(81.4)	(96.4)	(10.6)

Drivelines

- Spicer 1710 Series with "half round" yokes

Boom

- Two piece triangular telescoping boom
- Adjustable boom rollers with eccentric shafts
- 220° boom tilt
- 105° boom pivot angle

Upperstructure Controls

- Two electronic joysticks control (hoist, bucket, telescope and swing)
- One rocker switch (tilt) control
- Joysticks are mounted on arm pods that are adjustable for individual operator comfort and convenience
- Quick change joystick pattern using interactive display
- Two foot pedals for remote control of undercarriage travel and brakes
- Steering is handled with a rocker switch on top of the left hand joystick
- Forward and reverse travel selected with right-hand joystick button
- Self-centering joysticks and pedals; when controls are released, power for movement disengages and swing and travel brakes set automatically

System Monitor

- Top selector buttons include
 - Joystick pattern, hour meter and indicator lamps
- Bottom selector buttons include
 - Engine speed control, auto idle select
 - A/C on select and heater temperature control

The display shows as follows

- Park brake
- Low air brake pressure
- Malfunction indicator lamp (mil)
- Hydraulic oil level warning
- Hydraulic oil filter warning
- Engine stop lamp
- Amber warning lamp (engine)
- Wait to start lamp
- Diesel particulate filter lamp
- High exhaust system temperature
- Engine speed
- Fuel level
- DEF level
- Transmission gear request
- Transmission gear status
- Transmission oil temp
- Hydraulic oil temp
- Mode status (travel/remote)
- Check transmission lamp
- Cab blower fan

Upperstructure Cab

- All-weather cab isolated from frame on rubber mounts
- Tinted safety glass windows
- Skylight

Upperstructure Cab Cont.

- Acoustical lining
- Four-way adjustable seat
- Dome light
- Filtered air heater and defroster
- AM/FM radio
- Air conditioning
- Heat source provided by a fast response, closed circuit hydraulic heater with 20,000 BTU/Hr. capacity
- Front window slides to overhead storage
- Mirrors on right and left sides
- Windshield wiper and washer
- Operator's seat belt

Hydraulic System

Pumps

- One load-sensing bent axis piston pump; 0-58 GPM (0-219 L/min) total
- One gear pump (pilot and cooling), 11 gpm (41 L/min)

SYSTEM SPECIFICATIONS

Four Double Acting Cylinders

- One boom cylinder: 3.5" (89 mm) bore x 2.56" (65 mm) rod x 150" (3.81 m) stroke
- Two hoist cylinders: 3.75" (95.25 mm) bore x 3.15" (80 mm) rod x 31" (787 mm) stroke
- One tool cylinder: 4.25" bore x 3.0" rod x 25.9" stroke (108 mm x 76 mm x 658 mm)

Two Hydraulic Motors

- Swing, 64 hp (48 kW)
- Tilt, 21 hp (16 kW)

Operating Pressures

- Hoist..... 4,800 psi (331 BAR)
- Tilt 2,500 psi (172 BAR)
- Swing 4,200 psi (290 BAR)
- Tool 4,800 psi (331 BAR)
- Telescope 4,800 psi (331 BAR)
- Pilot system..... 500 psi (35 BAR)

Oil Capacity

- Reservoir 50 gallons (189 L)
- System 70 gallons (265 L)
- Pressurized reservoir with visual oil level gauge

Filtration System

- 5 micron return filter with magnet
- 10 micron pilot filter
- Fin and tube-type oil cooler with thermostatically controlled cooling fan
- Pressure-compensated, load-sensing valves with circuit reliefs in all circuits

Undercarriage

- 6 x 4
- Wheelbase: 171" (4.34m)
- Width 102" (2.6m)

Transmission

- Allison 3500 RDS 6-speed automatic

Frame

- 48" (1.2m) wide, welded plate design
- 65 ksi material

Gross Vehicle Axle Weight Rating:

- 6 x 4 - 68,040 lb (30,862 kg)

Front Axles

- 6 x 4: Meritor Model FL941, 20,000 lb (9,072 kg) rating

Rear Axle

- Meritor Model RT-50-160, 50,000 lb (22,680 kg) rating, 7.17 ratio
- Single reduction with driver controlled differential lock in front/rear
- Inter-axle differential with lock

Suspension

- Front: Eight leaf spring with automatic lock-out cylinders
- Rear: Hendrickson Equalizer Beam, 8" oscillation

Brakes

- 6 x 4 Front: Meritor "Q" Plus Series
 - Cam-Master Size: 16.5" x 5" (419 mm x 152 mm)
 - Automatic slack adjusters
- Rear: Meritor "P" Series
 - Cam-Master Size: 16.5" x 7" (419 mm x 178 mm)
 - Automatic slack adjusters
- Spring brake system incorporates emergency and parking brakes on rear axle
- Heated air dryer

Steering

- Integral hydraulic power steering
- Gear-type power steering pump
- Four-quart power steering reservoir with filter
- 10 micron pre-filter

Wheels

- Hub piloted disc
- 10-stud, 11.25" (286 mm) bolt circle

Tires

- 6 x 4 front: 315/80R22.5 LR (J) on/off highway tread
- 6 x 4 rear: 11R24.5 LR (G) on/off highway tread

Standard Chassis Equipment

- LED headlights
- LED tail lights
- LED back-up lights and alarm
- LED brake lights
- LED identification lights front and rear
- LED directional lights
- LED four-way hazard lights
- Instrument panel lights
- Windshield wiper/washer
- West Coast style mirror system with plain and convex mirrors
- Front and rear tow hooks
- Desiccant type air dryer with automatic purge valve and thermostatically controlled heater

Chassis Cab

- One-person cab
- Left-hand mount
- Isolated from frame on rubber mounts
- Acoustical lining
- Sun visor
- Air conditioning

Gauge Clusters

- Oil pressure
- Coolant temperature
- Air tank pressures
- Fuel level
- DEF level
- Voltmeter
- Speedometer with odometer
- Tachometer with hour meter
- Engine and transmission monitor lights

- Engine shutdown controlled by engine electronics
- Indicator lights and controls for rear axle differential lock
- Park brake control
- Tinted safety glass
- Sliding side windows
- Fresh air heater and defroster
- Dome light
- Air suspension seat with seat belt
- Vent in door

Swing

- Internal swing gear
- Priority swing circuit with axial piston motor
- Planetary transmission

Swing Speed: 8.0 rpm

Swing Brake:

- Automatic spring-set/hydraulic release wet disc parking brake
- Dynamic braking provided by hydraulic system

Hydraulic Remote Control

- Upperstructure powered by chassis hydraulics through PTO
- Travel and brake pedals in the upperstructure cab
- Steering controlled with rocker switch on left-hand joystick
- Digging brakes and front axle lockout cylinders set automatically with travel pedal in neutral
- Parking brakes controlled by toggle
- Electrically operated alarm mounted on undercarriage signal remote control movement in either direction, reverse movement when driven from undercarriage cab

Function Forces

Rated Boom Force: 21,940 lbs (97.6 kN)

Rated Bucket Breakout Force: 17,990 lbs (80 kN)

GRADALL Model M 4100 Lift Capacity Over Side or Rear - LBS (KG)

LOAD POINT HEIGHT		LOAD RADIUS										
		10' 0" (3.0 m)		15' 0" (4.6 m)		20' 0" (6.1 m)		25' 0" (7.6 m)		Max. radius		
		Over End	Over Side	Over End	Over Side	Over End	Over Side	Over End	Over Side		Over End	Over Side
ABOVE GROUND LEVEL	20' 0" (6.1 m)									23' 5" (7.1m)	3525 (1600)	3525 (1600)
	15' 0" (4.6 m)			7785 (3530)	7785 (3530)	5265 (2390)	5265 (2390)	3690 (1675)	3690 (1675)	25' 10" (7.9m)	3485 (1580)	3485 (1580)
	10' 0" (3.0 m)			9185 (4165)	9185 (4165)	5930 (2690)	5930 (2690)	4070 (1845)	4070 (1845)	27' 0" (8.2m)	3525 (1600)	3525 (1600)
	BOOM LEVEL 8' 8" (2.7 m)			9400 (4265)	9400 (4265)	6040 (2740)	6040 (2740)	4135 (1875)	4135 (1875)	27' 2" (8.3m)	3540 (1605)	3540 (1605)
	5' 0" (1.5 m)			9445 (4285)	9445 (4285)	6130 (2780)	5995 (2720)	4210 (1919)	4100 (1860)	27' 2" (8.3m)	3600 (1635)	3510 (1590)
AT GROUND LEVEL				8245 (3740)	8245 (3740)	5735 (2600)	5735 (2600)	4065 (1845)	3970 (1800)	26' 5" (8m)	3705 (1680)	3600 (1635)
BELOW GROUND LEVEL	5' 0" (1.5 m)	7170 (3250)	7170 (3250)	6430 (2915)	6430 (2915)	4940 (2240)	4940 (2240)			24' 5" (7.5m)	3800 (1725)	3800 (1725)
	10' 0" (3.0 m)	4420 (2005)	4420 (2005)	4745 (2150)	4745 (2150)	4010 (1820)	4010 (1820)			21' 1" (6.4m)	3825 (1735)	3825 (1735)
	15' 0" (4.6 m)	2650 (1200)	2650 (1200)	3400 (1540)	3400 (1540)					15' 2" (4.6m)	3400 (1540)	3400 (1540)


■ Shaded areas are stability rated based on machine with 0 lb. bucket.

The rated lift capacity is based on the machine being equipped with 6,000 lb (2720 kg) counterweight, standard boom, standard tires, no auxiliary hydraulics and no bucket.

The load point is located on the bucket pivot point, including load listed for maximum radius.

Do not attempt to lift or hold any load greater than these rated values at specified load radii and heights. The weight of slings and any auxiliary devices must be deducted from the rated load to determine the net load that may be lifted.

ATTENTION: All rated loads are based on the machine being stationary and level on a firm supporting surface. For safe working loads, the user must make allowance for his particular job conditions such as soft or uneven ground, out of level conditions, side loads, hazardous conditions, experience of personnel, etc. The operator and other personnel must be fully trained and understand the Operator's Manual and Safety Manuals furnished by the manufacturer before operating this machine. Rules for safe operation of equipment must be adhered to at all times.

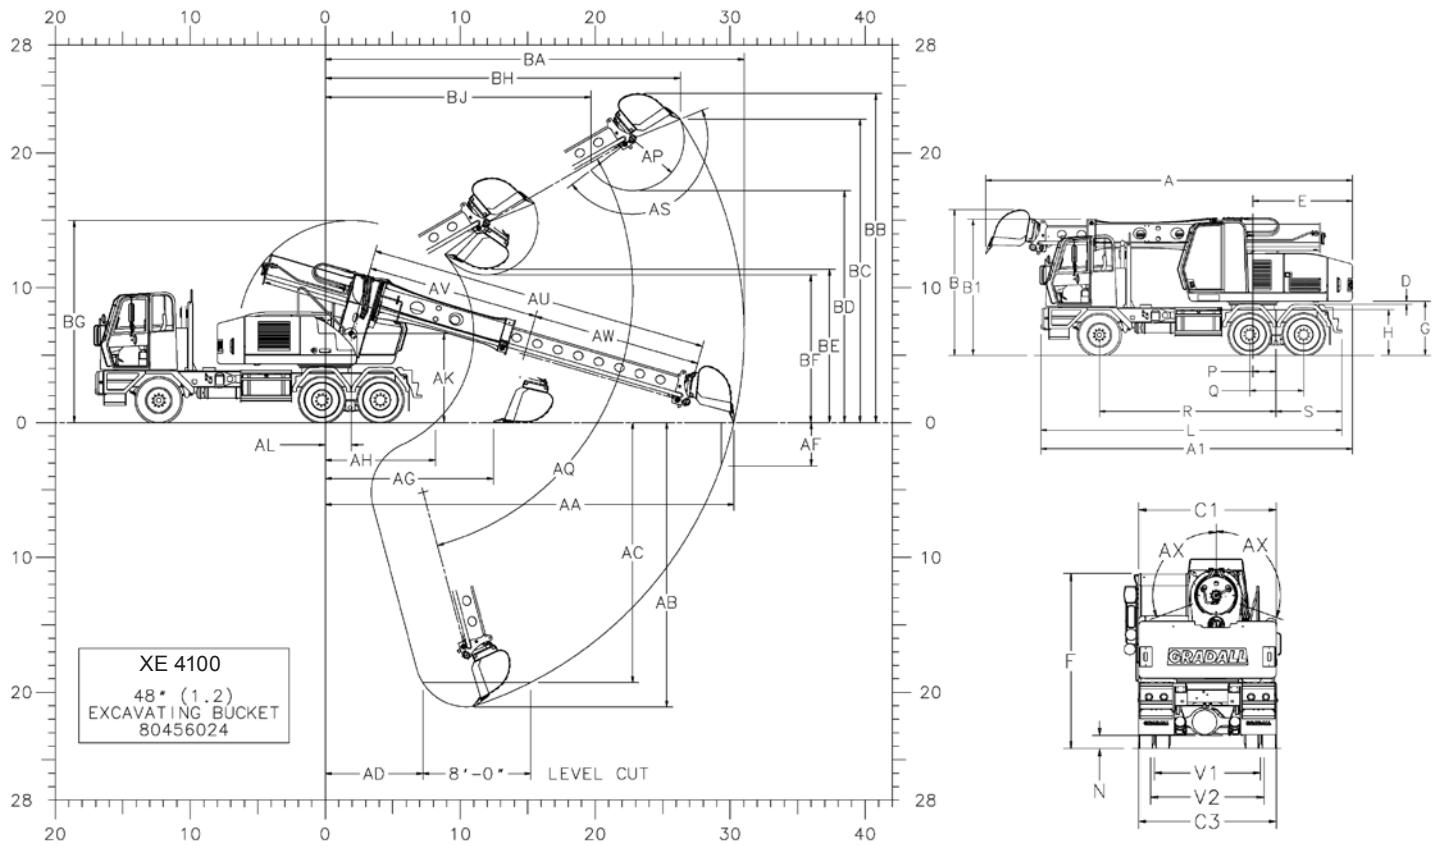

Dimensions

6 x 4			6 x 4		
A	29' (8.8m)	Overall length (boom in rack) w/ bucket	AG	12' 5" (3.8m)	Minimum level cut radius with bucket flat on ground line
A1	24' 7" (7.5m)	Overall length (boom in rack) w/o bucket	AH	8' 2" (2.5m)	Minimum radius at ground line
B	11' 9" (3.6m)	Overall height (boom in rack) w/ bucket	AK	6' 7" (2m)	Boom pivot to ground line
B1	10' 11" (3.3m)	Overall height (boom in rack) w/o bucket	AL	23" (584mm)	Boom pivot to axis of rotation
C1	8' 6" (2.6m)	Width of upperstructure	AP	46" (1.2m)	Bucket tooth radius
C3	8' 6" (2.6m)	Width of undercarriage	AQ	30° Up & 75° Down	Boom pivot angle
D	3" (76mm)	Minimum clearance, upperstructure to undercarriage	AS	165°	Bucket pivot angle
E	7' 6" (2.3m)	Swing clearance, rear of upperstructure	AU	25' 3" (7.7m)	Maximum telescoping boom length (boom pivot to bucket pivot)
F	10' 10" (3.3m)	Top of cab to ground line	AV	12' 9" (3.9m)	Minimum telescoping boom length (boom pivot to bucket pivot)
G	52" (1.3m)	Clearance, upperstructure to ground line	AW	12' 6" (3.8m)	Telescoping boom travel
H	44" (1.1m)	Top of wheel mounted under carriage frame to ground line	AX	110°	Bucket tilt angle (both sides of center)
L	24' 2" (7.4m)	Overall length of undercarriage	BA	31' 0" (9.5m)	Maximum radius of working equipment
N	10" (254mm)	Ground clearance (per SAE J1234)	BB	24' 5" (7.4m)	Maximum height of working equipment
P	22" (564mm)	Center of rear tandem to axis of rotation	BC	22' 6" (6.9m)	Maximum bucket tooth height
Q	52" (1.3m)	Distance between centers of tandem axles	BD	17' 2" (5.2m)	Minimum clearance of bucket teeth, with bucket pivot at maximum height
R	14' 2" (4.3m)	Wheelbase	BE	11' 4" (3.5m)	Minimum clearance of fully curled bucket at maximum boom height
S	5' 4" (1.6m)	Center of rear axle to rear of frame (step)	BF	10' 11" (3.3m)	Minimum clearance of bucket teeth at maximum boom height
V1	6' 7" (2.0m)	Tread, rear axles (285/75R24.5 tires)	BG	15' 0" (4.6m)	Maximum height of working equipment with bucket below ground line
V2	7' 0" (2.1m)	Tread, front axle (385/65R22.5 tires)	BH	26' 4" (8.0m)	Radius of bucket teeth at maximum height
AA	30' 3" (9.2m)	Maximum radius at ground line (165° pivot)	BJ	19' 8" (6.0m)	Minimum radius of bucket teeth at maximum bucket pivot height
AB	20' 3" (6.2m)	Maximum digging depth			
AC	19' 3" (5.9m)	Maximum depth for 8' level cut			
AD	7' 3" (2.2m)	Minimum radius of 8' level cut at depth "AC"			
AF	3' 3" (1.0m)	Maximum depth of vertical wall which can be excavated			

Specifications subject to change without notice.
 Metric units are meters (m) unless noted.
 Machines shown may have optional equipment.

Weight

- Approximate working weight, fuel tank half full
- 6 x 4: 44,900 lbs (20,366 kg)

Optional Equipment

- Aux Hydraulics
- LED Work Lights
- Strobe light
- Tilt steering column

Attachments

- Quick change and reversible buckets fabricated using steel plate with high strength, low alloy cutting edges and wear strips
- Standard attachments available for wide range of applications
- Capacities shown are in heaped cubic yard



Excavating Bucket

		yd ³	m ³
8045-6020	24" (610mm) 603 lbs (274 kg)	3/8	0.31
8045-6021	30" (762mm) 660 lbs (300 kg)	1/2	0.41
8045-6022	36" (914mm) 741 lbs (336 kg)	5/8	0.54




Dredging Bucket

		yd ³	m ³
8065-6013	72" (1.83m) 1114 lbs (505 kg)	1 1/8	0.87




Trenching Bucket

		yd ³	m ³
8065-6104	15" (381mm) 897 lbs (407 kg)	1/5	0.15
8065-6012	21" (533mm) 982 lbs (445 kg)	1/4	0.19




Tree Limb Shear

8045-5052	1,948 lbs (884 kg)
-----------	--------------------




Pavement Removal Bucket

8065-6115	18" (0.457 m) 929 lbs (421 kg)
8065-6116	24" (0.610 m) 1,219 lbs (553 kg)
8065-6114	28" (0.711 m) 1,310 lbs (594 kg)

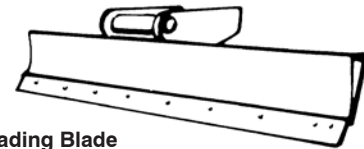


Grading Blade

8065-6024	8" (2.4 m) 630 lbs (285 kg)
-----------	--------------------------------



Ditching Bucket

		yd ³	m ³
8065-6007	60" (1.52m) 807 lbs (366 kg)	7/8	0.73
8065-6006	66" (1.68m) 892 lbs (405 kg)	1	0.76



Fixed Thumb Grapple

8075-5023	1,574 lbs (714 kg)
-----------	--------------------

It is Gradall Policy to continually improve its products. Therefore designs, materials and specifications are subject to change without notice and without incurring any liability on units already sold. Units shown may have optional equipment.

GRADALL®

406 Mill Ave. SW, New Philadelphia, Ohio 44663
Phone: 800-445-4752
www.Gradall.com



Form No. 12601 04/26
Printed in USA